

# ZCORR 21st century leak detection

## Planning

Now you can truly be in control of your leak detection program... *all from your desktop or field computer.*

ZCORR is a network of Digital Correlating Loggers (DCLs) which pinpoint the exact locations of any leaks in one overnight surveillance. The easy-to-use ZCORR software revolutionizes the ease and accuracy of pipeline leak detection and pinpointing.

ZCORR lets the leak detection manager plan the placement of the ZCORR DCLs and analyze and review the overnight recording results - *all from the comfort and convenience of the office!*



## Deployment

ZCORR is flexibly designed for a variety of deployment strategies:


- ◆ One night - one zone
- ◆ Multiple nights - one zone
- ◆ Multiple nights - multiple zones

Deployment is planned by you, either in the office or in the field, working from your distribution system maps.



### Work Order No. 21

Zone: A      Deploy: 08/01/00  
DCLs: 1-18      Retrieve: 08/02/00

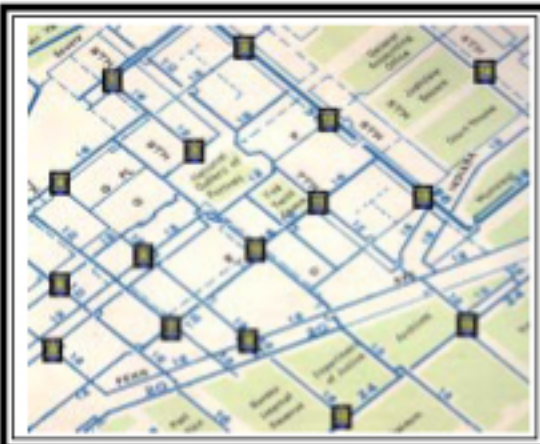

Logger ID	Address	Deployed by (date)	Retrieved by (date)
1	Valve 22 @ 8th Avenue & 13th St		
2	Valve 26 @ 8th Avenue & 14 Street		
3	Valve 17 @ 8th Avenue & O Street		
4	Valve 23 @ 8th Avenue & H Street		

## Sample Deployment Scenario

Sat:

Enter the location of each Digital Correlating Logger (DCL); navigate the digitized map and click to place DCL at its location. DCLs are typically placed 400 to 4,000 feet apart depending on the environment.

Finish

A printed ZCORR Work Order directs field personnel to place DCLs on specific valves or other pipe fittings.

The next morning field personnel replace the DCLs in their Docking Station. The Docking Station connects to your desktop PC, laptop, or rugged mobile computer via a USB or serial link.

Download

Nighttime data recorded by the DCLs is transferred to the PC; permanently stored; and analysis is automatically performed, pinpointing the locations of any leaks present.

# Analysis

**Auto Analysis:**

*Zo*rr automatically correlates data among all DCLs, pinpointing the map locations of any leak sounds present. Click on any pair of DCLs to see the leak noise correlation.

**Listen**

*Zo*rr lets you listen to actual nighttime recorded leak sounds. Click on any logger symbol or leak index bar to hear the leak sound at that map location.

**Correlation Results:**


Click on any thumbnail image to get a detailed analysis: pinpoint multiple leaks; enter pipe information; see logger and leak locations on map.

**Summary:**

Shows a zone map with all DCLs and a summary table with all significant correlations and exact locations of pinpointed leak noises.

**Report:**

Prints a full report of the *Zo*rr analysis for the entire zone.

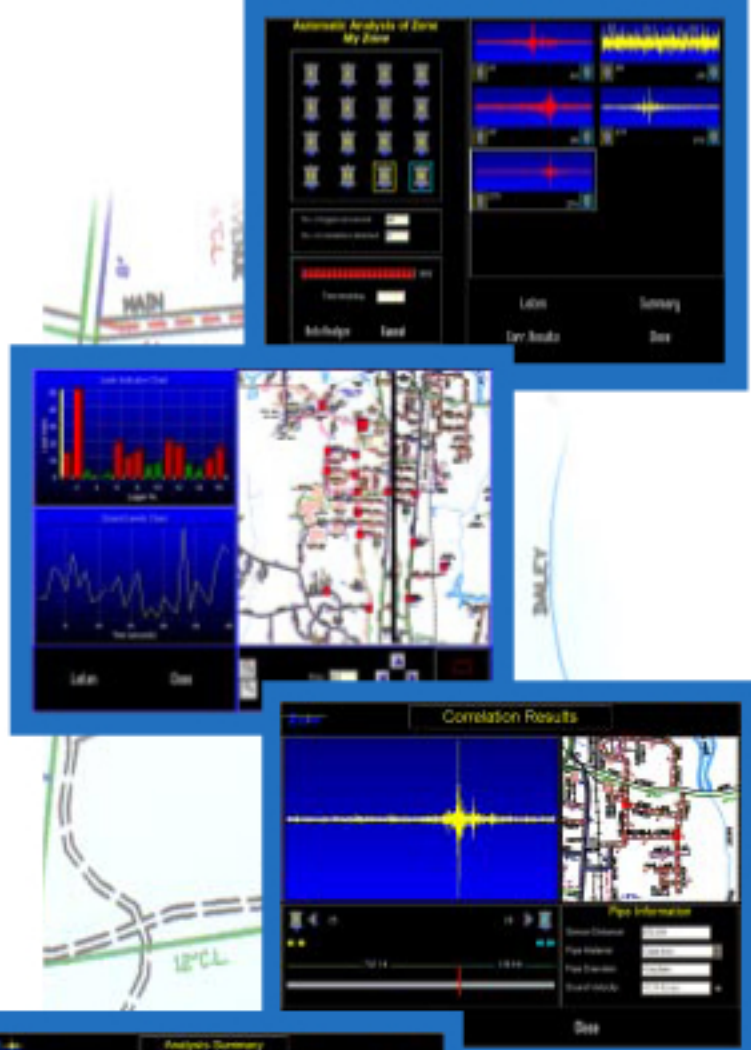

## *Zo*rr ... the Digital Correlating Logger

Feature	<i>Zo</i> rr	Conventional Noise Loggers	Permanently Installed Noise Loggers
Pinpoints leak	Yes	No	No
Actual audio recording	Yes	No	No
Upgradeable/Reprogrammable	Yes	No	No
Digital mapping	Yes	No	No
Identifies multiple leaks	Yes	No	No
Communication mode	Internet/Docking Station	Docking Station	Drive-by Radio

# Technical Specifications

## Digital Correlating Logger (DCL)

Enclosure: Aluminum, cylindrical  
Protection: IP68 – fully submersible  
Weight: 1 lb (450 grams)  
Dimensions: Height = 4.5 inches (11.4 cm)  
Diameter = 2.25 inches (5.7 cm)  
Mounting: Magnet, 40 lbs (18 kg) pull force  
Operating temperature range: -20 to +140°F  
(-30 to +60°C)  
Power Source: Lithium battery, 5-year life,  
factory-replaceable, non-rechargeable  
Sensor: High resolution electronic accelerometer;  
Shockproof to 6,000 g;  
Sensitivity - 1 V/g;  
Resolution - 0.25  $\mu$ g/Hz  
Data Acquisition: Frequency range: 1-3,000 Hz;  
Signal range: sub 1  $\mu$ g – 20 mg;  
Digital Resolution: 20 bits

## Docking Station

Enclosure: Rugged ABS carrying case  
Protection: IP68 - closed; IP65 - open  
Weight: 15 lbs (6.8 kg) without DCLs  
Dimensions: 20.5 x 16.75 x 8.5 inches  
(52 x 42 x 22 cm)  
Operating temperature range: 20 to 140°F  
(-5 to +60°C)  
Capacity: 3 to 16 DCLs  
PC link: RS-232 or USB

## Product Features

- ◆ **Z<sub>ORR</sub>** DCLs are locally intelligent. They feature auto-power management (have no on/off switch) and never require user intervention.
- ◆ **Z<sub>ORR</sub>** software has a familiar web browser interface, making it as easy to use as a remote control.
- ◆ The **Z<sub>ORR</sub>** system is expandable from 3 to an unlimited number of DCLs so it can grow with your leak detection program.
- ◆ With **Z<sub>ORR</sub>** a manager can run a leak detection program across pipeline networks anywhere in the world. DCLs can be transported ready to deploy, or setup and deprogrammed remotely, with data access and analysis by internet or email.
- ◆ **Z<sub>ORR</sub>** is fully upgradeable through software, making the latest technical advances available to all users.



For more information contact:

## Flow Metric, Inc.

Two Clock Tower Place  
Suite 425  
Maynard, MA 01754  
800.517.4737 (toll-free)  
978.897.2033  
978.897.2497 (fax)  
www.flowmetric.com