


MB05 MOUNTED BREAKER

STANLEY®

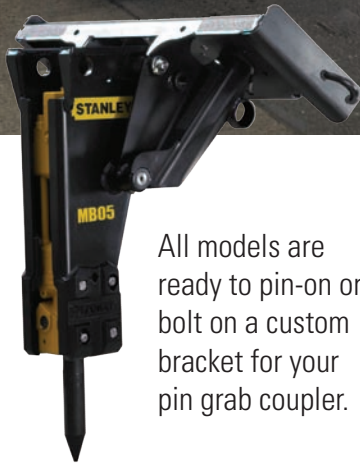

The new **MB05** is designed for years of dependable service. The wide flow range let's you go from your skidsteer to mini-excavator with ease. The skidsteer bracket has four positions to allow you to tackle floors and walls.

All models are ready to pin-on or bolt on a custom bracket for your pin grab coupler.



We COVER ALL THE ANGLES you need to get the job done
Four position skid steer mounting bracket

SPECIFICATIONS

Impact Energy Class	ft - lb	550
	J	750
Blows Per Minute	bpm	650 - 1550
Flow Range	gpm	10 - 22
	lpm	38 - 83
Hydraulic Operating Pressure	psi	1500 - 2000
	bar	100 - 140
System Relief Pressure (min. cracking)	psi	3000
	bar	207
Oil Temperatures (max.)	F	190
	C	88
Hose Diameter (min.)	inch	3/4
	mm	19
Adapter Fitting Size and Type	Male JIC 37 degree Flare 1-1/16x12 UNF	
Weight – Skid Steer Model (with tool)	lb	810
	kg	368
Weight – Side Plate Model (with tool)	lb	480
	kg	218
Length - Side pLate Model (with tool)	inch	53
	mm	1346
Tool Diameter	inch	2.6
	mm	67
Tool Working Length	inch	15
	mm	381
Main Accumulator Charge Pressure	psi	200 +/- 10
	bar	13.8 +/- 0.7
Sound Power Level (LW)	dBA	125
Carrier Size - Skidsteer	lb	4500 - 7000
	kg	2045 - 3182
Carrier Size - Excavator	lb	5000 - 8000
	kg	2273 - 3636
Carrier Size - Backhoe	lb	6000 - 11000
	kg	2727 - 5000

MB05 MOUNTED BREAKER

STANLEY®

ORDERING INFORMATION



MB05 e 00	MB05 s 02	MB05 e 04	MB05 s 04	MB05 e 05	MB05 s 05
Excavator, side plated breaker with 9" pin centers, 7" inner width, 2.25" diameter - with flat top bolt flange for mounting brackets	4 position skid steer cradle for 9" pin center side plated breaker	Excavator with CP027 top	Skid steer with CP027 top	Excavator with exchange top	Skid steer with exchange top

ACCESSORIES



69863	69864	69865	69866	69867
Conical	Chisel, Cross Cut	Chisel, Line Cut	Blunt	Tamping Pad